




UGY2000LZS

UNIVPOWER SILENT SERIES

POWER OUTPUT

Prime Rating — 1640 kW (2050 kVA)
 Standby Rating — 1804 kW (2255kVA)
 3-Phase, 50 Hertz, 0.8 PF

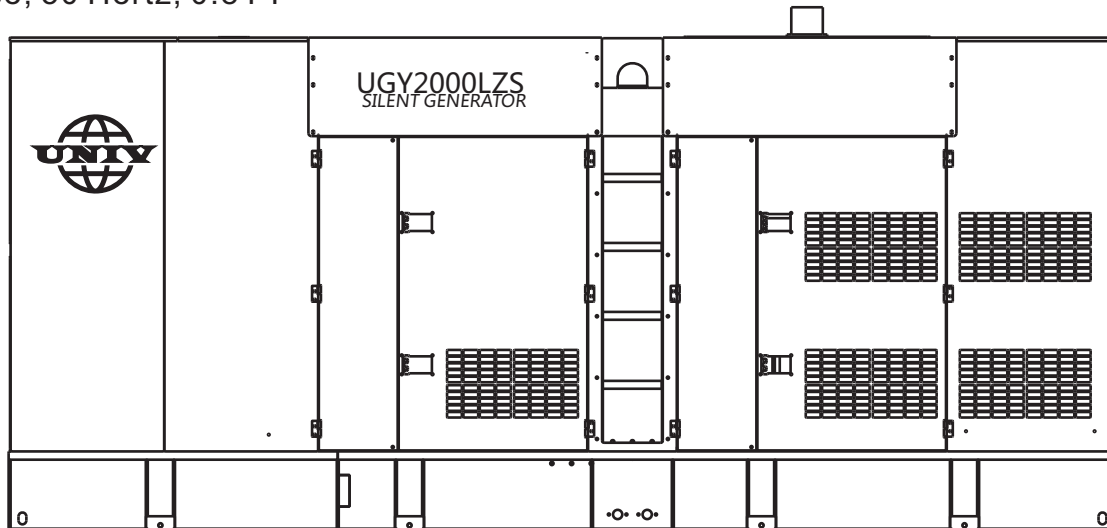

STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
 - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
 - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to $\pm 0.25\%$.
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 88dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel
E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
 - High visibility LCD display with heated screen and alphanumeric readout.
 - IP65 Protection standard, operational temperature range of -40° to 85° C.
 - Modbus interface for gauge panel and expansion options.
 - DPF cleaningcycle indication.
 - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

UNIVPOWER SILENT SERIES

UNIV POWER DECIBELLEVELS


Revolving field, self ventilated weatherproof Normal conversation allows substantially lower operating noise levels than competitive designs. UNIV Gensets good for home, construction sites, residential, hospital, etc.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 6m
- 50 — Normal conversation

→ UNIVGenset at 7m

88.0
DECIBELS

GENERATOR OUTPUT PANEL

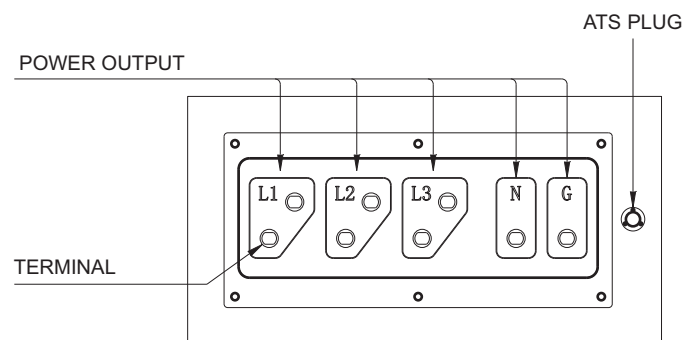



UGY2000LZS

UNIVPOWER SILENT SERIES

SPECIFICATIONS

| Generator Specifications | |
|--|--|
| Model | Revolving field, self-ventilated weatherproof |
| Armature Connection | Star with Neutral |
| Phase | 3 |
| Standby Output | 1840KW (2255KVA) |
| Prime Output | 1650KW (2020KVA) |
| Power Factor | 0.8 |
| Voltage Regulation (No load to full load) | ±0.5% |
| Generator RPM | 1500 |
| Frequency | 50 Hz |
| No. of Poles | 4 |
| Excitation | Brushless with AVR |
| Frequency Regulation: No Load to Full Load | Isochronous under varying loads from no load to 100% rated load |
| Frequency Regulation: Steady State | ±0.25% of mean value for constant loads from no load to full load. |
| Insulation | Class H |
| Sound Level dB(A) Full load at 7M | 88 |

| Amperage | |
|--|--------------|
| Rated Voltage | Maximum Amps |
| 3Ø Volt 230/400 | 2977 Amps |
| 3Ø Volt 220/380 | 3133.7 Amps |
| Main Line Circuit Breaker Rating | 3200 Amps |
| Over Current Relay Trip Set Point 400V Mode Only | 3520 Amps |

| Fuel System | |
|--------------------|-----------------------------|
| Fuel Tank Capacity | 396.3 gallons (1500 liters) |
| Fuel Consumption | L / h |
| At full load | 436.6 |
| At 3/4 load | 327.4 |
| At 1/2 load | 218.1 |
| At 1/4 load | 109 |

| Control system | |
|--------------------|-------------------------------|
| Controller Brand | Deepsea |
| Model | DSE7320 |
| Module | Manual/Auto start/stop module |
| Standard function | Engine control |
| | Generator monitoring |
| | Generator protection |
| | Specification |
| Display | Frequency |
| | Battery voltage |
| | Running hour |
| Warning/shutdown | under/over voltage |
| | under/over speed |
| | under/over frequency |
| | Low oil pressure |
| | High water temperature |
| Communication port | USB |

| Engine Specifications | |
|---------------------------|---|
| Make / Model | SME / S16R-PTAA2-C |
| Emissions | / |
| Starting System | Electric |
| Design | 4-cycle, water cooled, direct injection, Turbocharged |
| Displacement | 65.37 liters |
| No. cylinders | 16 |
| Bore x Stroke | 170 x 180 mm |
| Gross Engine Power Output | 2350 hp (1728 kW) |
| Compression Ratio | 14.0 : 1 |
| Engine Speed | 1500 rpm |
| Overspeed Limit | 2100 rpm |
| Oil Capacity | 60.8 gallons (230 liters) |
| Coolant Capacity | 44.9 gallons (170 liters) |
| Battery | 24V 150Ah x 4 |

| Alternator | |
|---------------------------------|--------------------------------|
| Alternator Brand | Stamford/Mecc alte/Kwise |
| Alternator Model | S7L1D-G/ECO46 1L4A/S454G1650D5 |
| Excitation | Brushless, Self-Excited system |
| Capacity(KVA) | 2020kva |
| Power(KW) | 1616kw |
| Efficiency(%) | 95% |
| Insulation class | Class H |
| Protection class | Ip23 |
| Steady state voltage regulation | ±1% |
| Voltage control | AVR |

WARRANTY*

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.




UGY2000LZS

UNIVPOWER SILENT SERIES

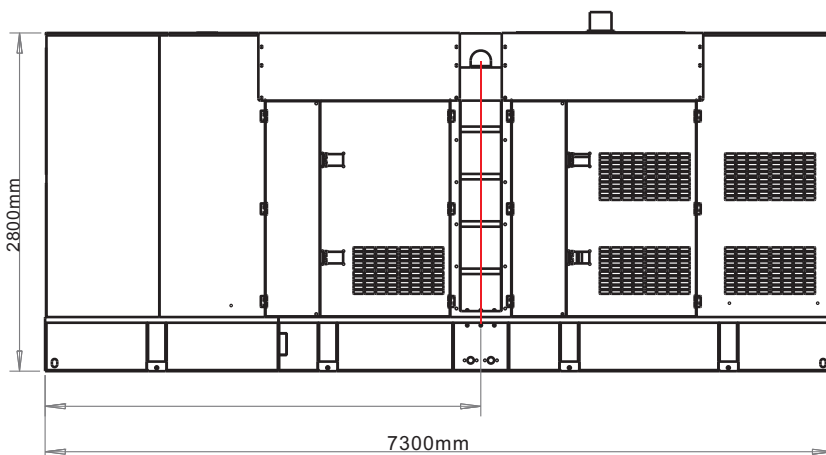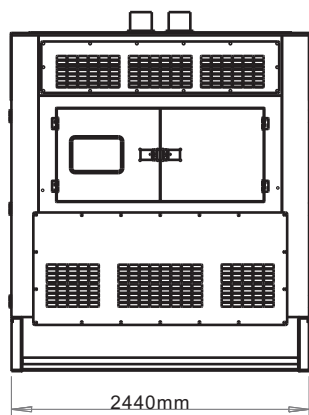

| Weight | |
|-----------------------------|-----------|
| Dry Weight | 14500 kg |
| Wet Weight | 16100 kg |
| Max. Lifting Power capacity | 30,400 kg |

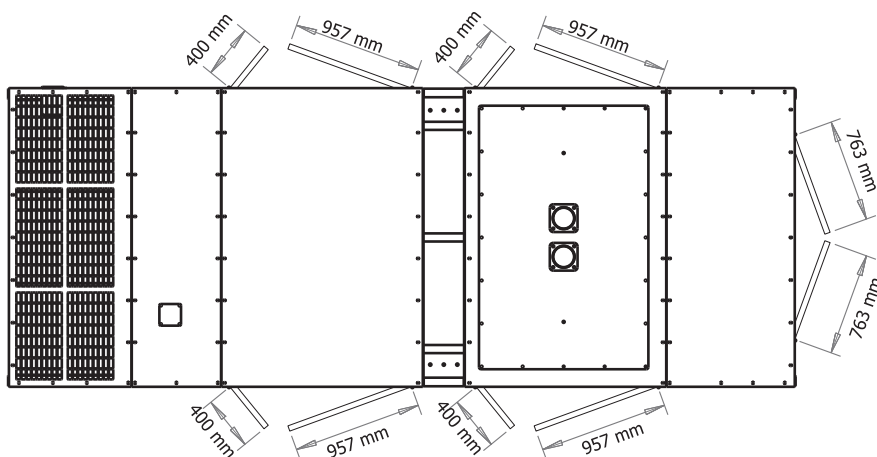

Manufactured by
Zhejiang Universal Machinery Co.,Ltd
Add:No 18-9 Nanshan Road, Qujiang Zone,
Quzhou city, Zhejiang Province, CN
Tel:0086-570-3377085
Fax:0086-570-3377086
Website:www.univpower.com